

LCD背面取付位置調整板

取り付け・取り扱いの手引き

856-122303-103-00

2007年 10月 初版

はじめに

このたびは、本製品をお買い上げいただき、ありがとうございます。
N8120-103 LCD背面取付位置調整板は、U-Station(US110) (以下「本体装置」と呼ぶ)で使用する取り付け用部品です。
本製品の取り付け・取り外しを行う前に、本書および取り付ける本体装置のユーザーズガイドをよく読んでから作業を行ってください。なお、本書は大切に保管してください。

安全上の注意

本製品を取り扱う前に本書の内容をよく読み、指示に従ってください。
また、本製品を取り付ける前に、本体装置に添付の「ユーザーズガイド」に記載されている注意事項も参照してください。(なお、組み立て作業は必ず本体装置の電源プラグを抜いた状態で行ってください。)

本書および「ユーザーズガイド」に記載されている注意事項を無視した取り扱いを行うと装置や周辺の家具に損害を与えるばかりでなく、感電やけが、火傷をするおそれがあります。

<警告表示について>



警告 人が死亡する、または重傷を負うおそれがあることを示します。

ステップ2 取り付けの準備

- 1 すべてのアプリケーションを終了して、システムを終了する。
- 2 本体装置の電源をOFFにして、電源コードを取り外す。




警告
本体装置の電源を必ずOFFにして電源コードを取り外してください。たとえ電源をOFFにしても、電源コードを接続したまま本体装置内部の部品に触れると感電するおそれがあります。また、濡れた手で電源コードを抜かないでください。感電するおそれがあります。

- 3 ケーブルを接続している場合は、本体装置からすべてのケーブルを取り外す。


ステップ3 取り付け手順

- 1 LCD背面取付位置調整板(以下「調整板」と呼ぶ)をネジでLCD背面に固定する。下図のようにLCD背面にある取り付け穴を利用して、調整板をLCD背面にネジ4本で固定してください。

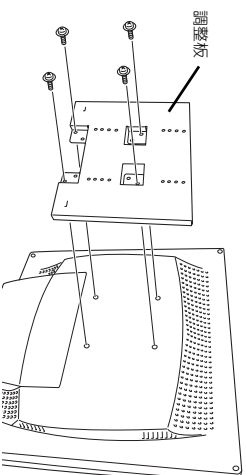

- 2 2つの縦置き・LCD背面ブラケット(以下「ブラケット」と呼ぶ)をネジで調整板に固定する。


下図のように、調整板にはブラケットの取り付け穴がそれぞれ4つずつあるので、取り付けたい位置を選んで、その取り付け穴に2つのブラケットをネジ2本ずつで固定してください。

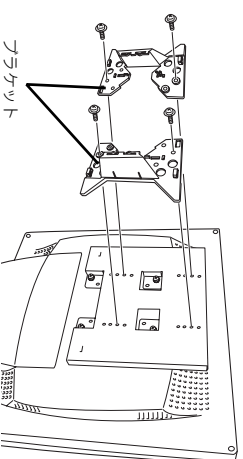


<右上にお進みください>

- 3 ブラケットに本体装置を固定する。

下図のように本体装置背面側が下になるようにした状態で、本体装置側面のくぼみにブラケットのフックを引っかけて固定し、反対側の本体装置側面もブラケットのフックにはまるように押し込んで固定してください。

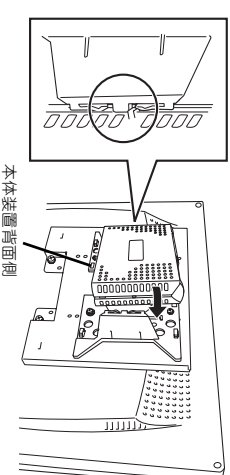

- 4 ケーブル類を固定するためのリピータタイ(2個)を調整板に取り付ける。

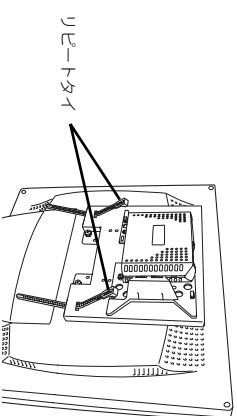

- 5 本体装置に接続されるケーブル類をリピータタイで固定する。

取り外し手順

- 1 すべてのアプリケーションを終了して、システムを終了する。
- 2 本体装置の電源をOFFにして、電源コードを取り外す。
- 3 本体装置のケーブルを取り外す。
リピータタイを外して、すべてのケーブルを外してください。
- 4 本体装置をベネズツールから取り外す。

第三者への譲渡について

本製品または本製品に添付されているものを第三者に譲渡(または売却)するときは、本製品に添付されている説明書一式を一緒にお渡しください。

本製品の廃棄について


本製品の廃棄については、各自当体の廃棄ルールに従ってください。

© NEC Corporation 2007 NECの許可なく複製・改変などを行うことはできません。

ステップ1 梱包品の確認

梱包箱には以下のもが入っています。

LCD背面取付位置調整板

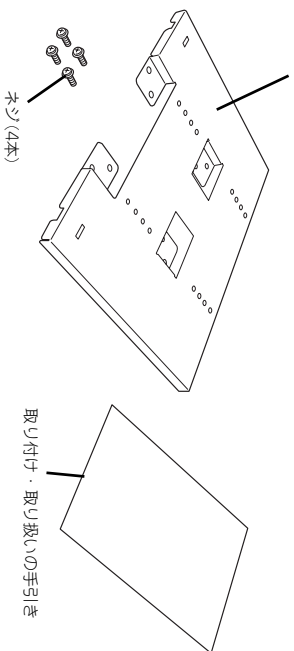

重要 LCD背面に本体装置を設置する際、N8120-102縦置き・LCD背面ブラケットが必要ですが、あらかじめ、N8120-102縦置き・LCD背面ブラケットもご購入ください。



LCD Mount Adjuster Option Installation and Handling Guide

856-122303-103-00

First Edition, October 2007

Preface

Congratulations for your purchase of our product.
 N8120-103 LCD mount adjuster option is used for installation of US110.
 Before installing or removing the product, read thoroughly this guide and the
 User's Guide of the US110. Keep this guide in a safe place for future use.

Safety Precautions

Follow instructions given in this guide for proper operations and safe use of the
 product.

See also "Notes on Safety" described in the "US110 User's Guide" that comes
 with your US110 before installing the product. Be sure to unplug the power
 cord of the US110 before starting installation.

Observe instructions given in this guide and the "US110 User's Guide" to use
 the US110 safely. Failure to follow these instructions may cause a fire,
 personal injury, or property damage.


<Safety Indication>

WARNING

Indicates the presence of a hazard that may result in death
 or serious personal injury.

Step 1 Checking Components

The shipping carton contains the following components.

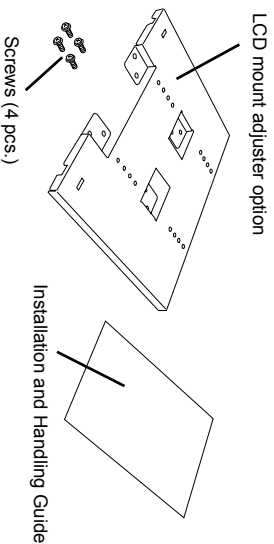

To install the US110 to the rear of LCD unit, you need to prepare
 N8120-102 Desk/LCD Mount Kit.

Step 2 Before Starting Installation

- Quit all the application programs and shutdown the system.
- Power off the US110, and unplug the power cord.


WARNING

Be sure to power of the US110 and unplug the power cord. If the US110
 is off-powered but its power cord is plugged to a power source, touching
 an internal component may cause an electric shock.
 Do not disconnect the power cord while your hands are wet. Doing so
 may cause an electric shock.


- Disconnect all the cables from the US110.

Step 3 Installation Procedures


- Fix the LCD mount adjuster option to the rear of the LCD unit with
 screws.
 As shown in the figure below, use the four screws to fix the LCD mount
 adjuster option to the rear of the LCD unit.

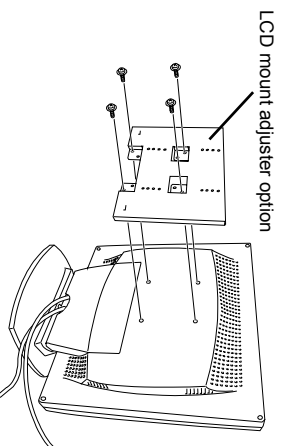

- Use the two N8120-102 Desk/LCD Mount Kit (called "bracket" hereafter),
 secure it to the LCD mount adjuster option with four screws.
 As shown in the figure below, four screw holes are provided for each
 bracket. Select the appropriate position, and secure the brackets with
 two screws each.

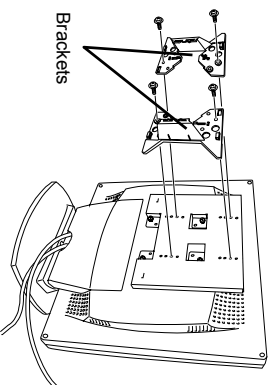


- Fix the US110 to the bracket.
 Place the US110 so that its rear panel faces downward, as shown in the
 figure below. Engage the hook of the bracket with cavity at either side of
 the US110, then engage another hook with the cavity at another side.
 Push the US110 until it is fixed.

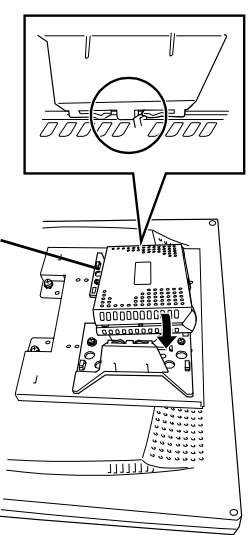

Rear face of US110

- Attach the two tie wraps for securing cables to the LCD mount adjuster
 option.

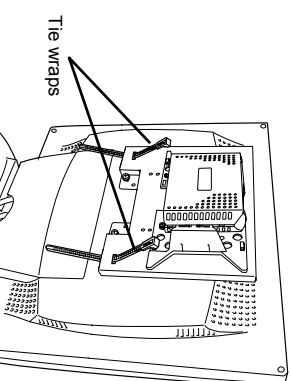

- Secure cables to be connected to the US110 with the wraps.

Removal Procedures

- Quit all the application programs and shutdown the system.
- Power off the US110, and unplug the power cord.
- Disconnect cables from the US110.
- Remove the tie wraps and disconnect all the cables.
 Remove the US110 from the pedestal.

Transfer to Third Party

When you transfer or sell this product to a third party, include all the
 attachments including this guide.

Disposal

Dispose of the product according to all national laws and regulations.

©NEC Corporation 2007

No part of this manual may be reproduced in any form without the prior written permission of
 NEC Corporation.